


## DAB POWER FILTER 1300W

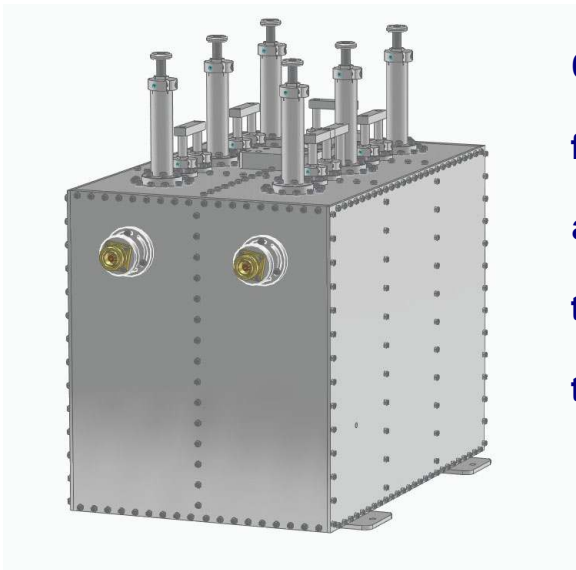

**6 pole 160mm cavity DAB filter**

**full-band tunable**

**all connectors DC - short**

**temperature stabilized**

**tuned to desired freq at our factory**

### **specifications :**

**RAFDA160.01**

**Max RMS input power**

**number of feedbacks**

**temperature stability**

**operating environment temperature**

**tuned channel width**

**tunable range**

**insertion loss**

**input reflections**

**group delay variation**

**... 160 mm cavities**

**... 1300W**

**... 1**

**... <1 kHz/°C**

**... -5 to 50°C**

**... 1.54 MHz**

**... 174-240 MHz**

**... 0.8 dB**

**... < -25 dB**

**... < 900 ns**

**dimensions**

**... 400x585x780 mm**

**weight**

**... 44 kg**